



PLAN
 NO. 1
 DATE: _____
 BY: _____
 CHECKED: _____
 APPROVED: _____

PROFILE
 NO. 1
 DATE: _____
 BY: _____
 CHECKED: _____
 APPROVED: _____

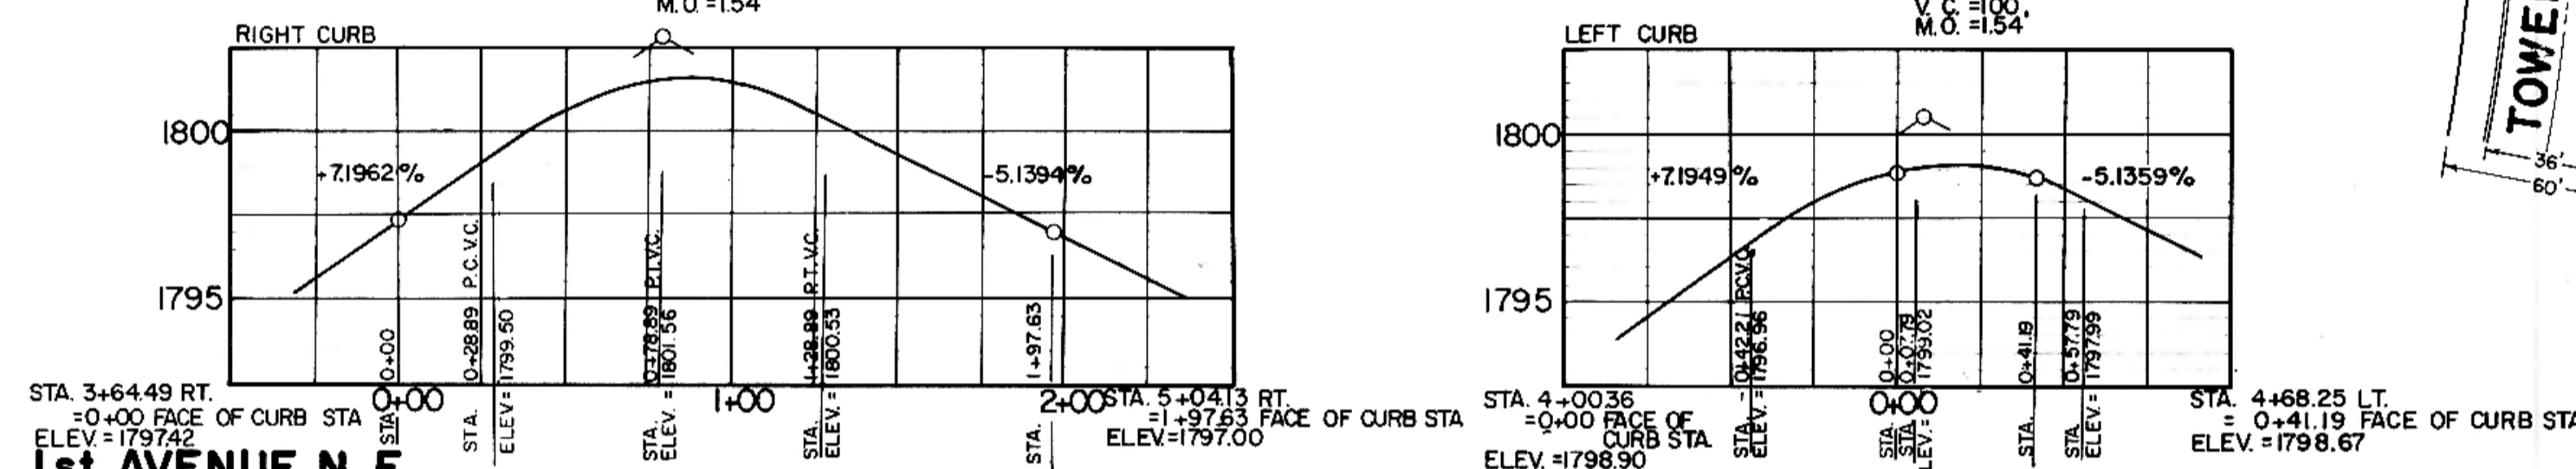

- NOTES:
- Proposed Sewer and Water Improvements on 11th Street NE and 1st Avenue NE are shown on plans for "Consolidated Sewer and Water Improvement District No. 25". Said Sewer and Water Improvements shall be installed prior to any street improvements and contractor shall be responsible for the preservation of said Sewer and Water Improvements during construction.
 - Depress crown and tip gutter section to allow drainage to flow across intersection as indicated.
 - Proposed grades are to top of curb unless otherwise stated.
 - All curb and gutter radii are 15 feet at face curb unless otherwise stated.
 - Embankment quantities shown include an assumed 30% shrinkage factor.

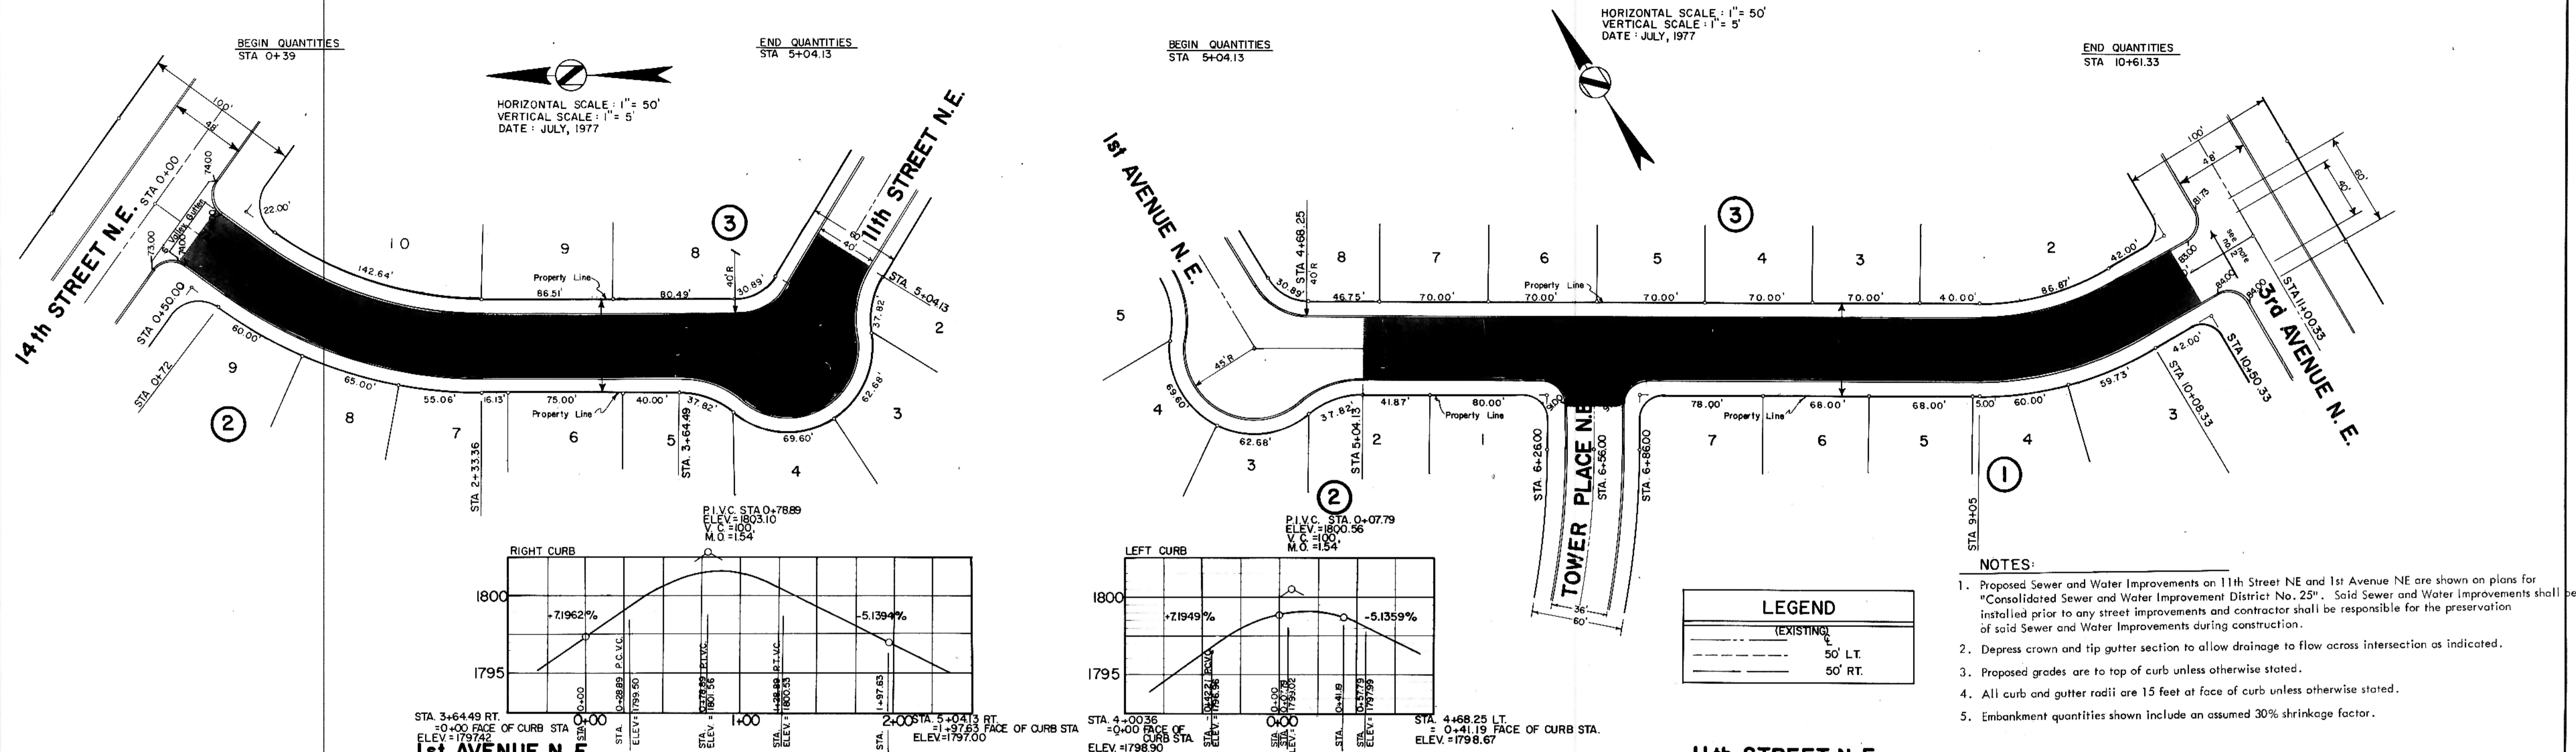